


Probe Specifications



Min. Pitch : 9.0 mm
Current Rating: 3amps continuous

Materials


Dielectric Insulator : Teflon
Signal Plunger: BeCu, Gold over Nickel
Shielding Plunger: Brass, Gold plated




Signal Plungers

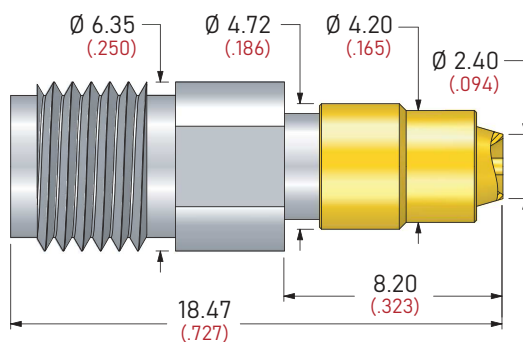

CT-U24

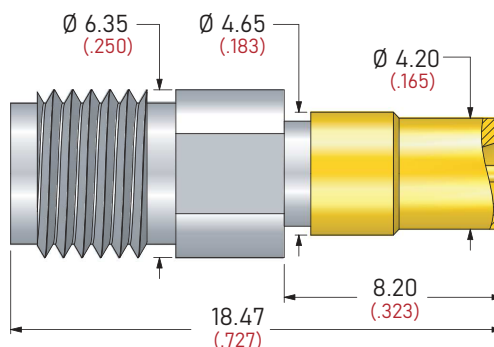


CT-42

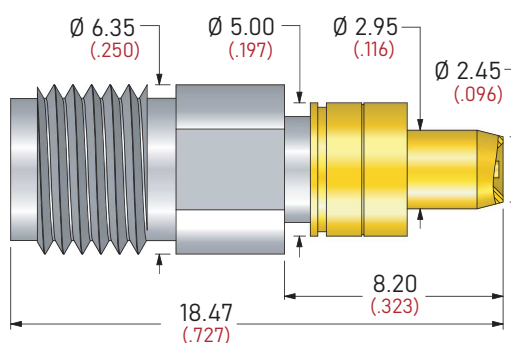


CT-25

Shielding Plungers

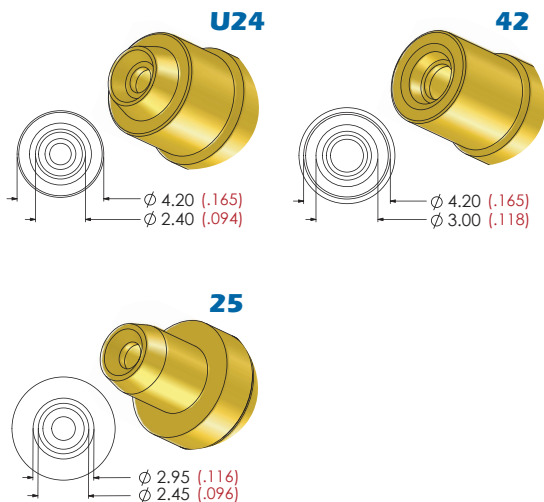

? How To Order

- (A) Shielding Plungers
- (B) Signal Plunger Shape
- (C) Standard Spring Force

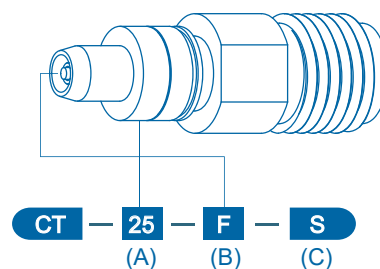

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)