




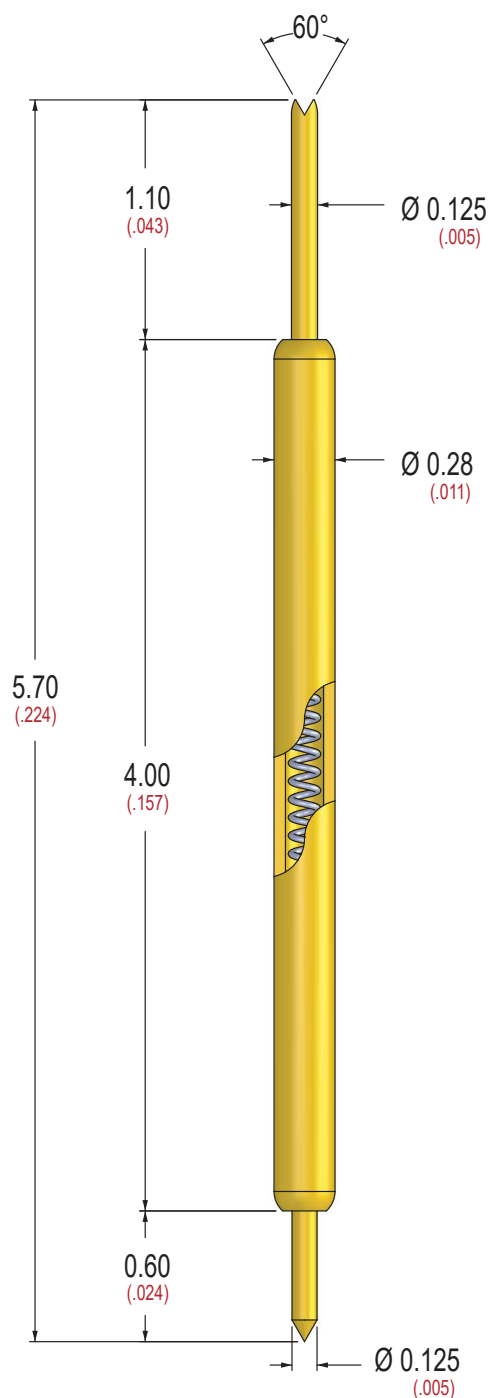

Top Side



Bottom Side



Electrical Specifications

Inductance(nH)	0.96
Capacitance(pF)	0.26
Delay Time(ps)	24.7
DC resistance(mohm)	<38
S21@-0.3dB	10.51GHz
S11@-20dB	10.14GHz

Probe Specifications

Full travel : 1.0mm stroke
 Spring Force : 20gf@ 0.7mm
 Barrel : PhBz, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or steel, Gold plated over Nickel
 Operating Temperature: -30° ~ 150°C