




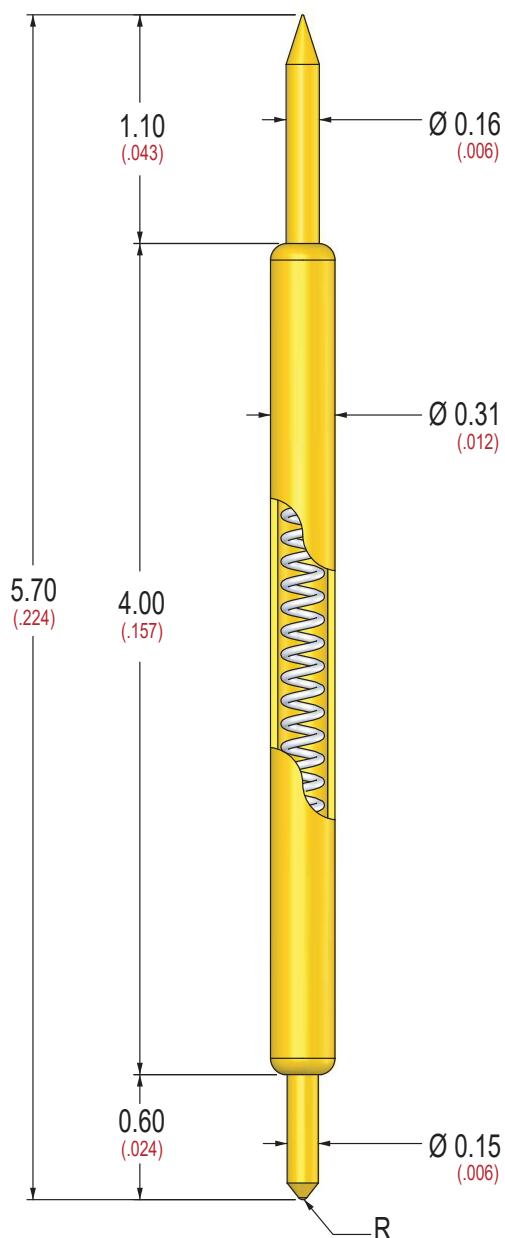

Top Side

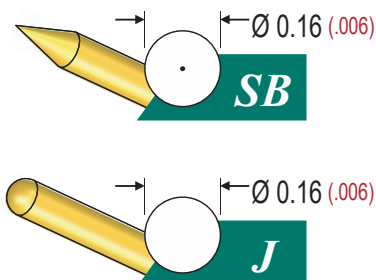

Bottom Side

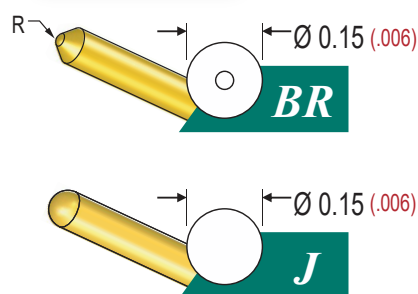

Electrical Specifications

Inductance(nH)	1.78
Capacitance(pF)	0.38
Delay Time(ps)	40.3
DC resistance(mohm)	<75
S21 @ -0.3dB	6.09GHz
S11 @ -20dB	5.13GHz

Probe Specifications

Full travel	: 1.0mm stroke
Spring Force	: 25gf@0.65mm
Barrel	: PhBz, Gold plated over Nickel
Spring	: SUS wire.
Plunger	: Full-hard beryllium copper or steel, Gold plated over Nickel
Operating Temperature	: -30° ~ 150° C