


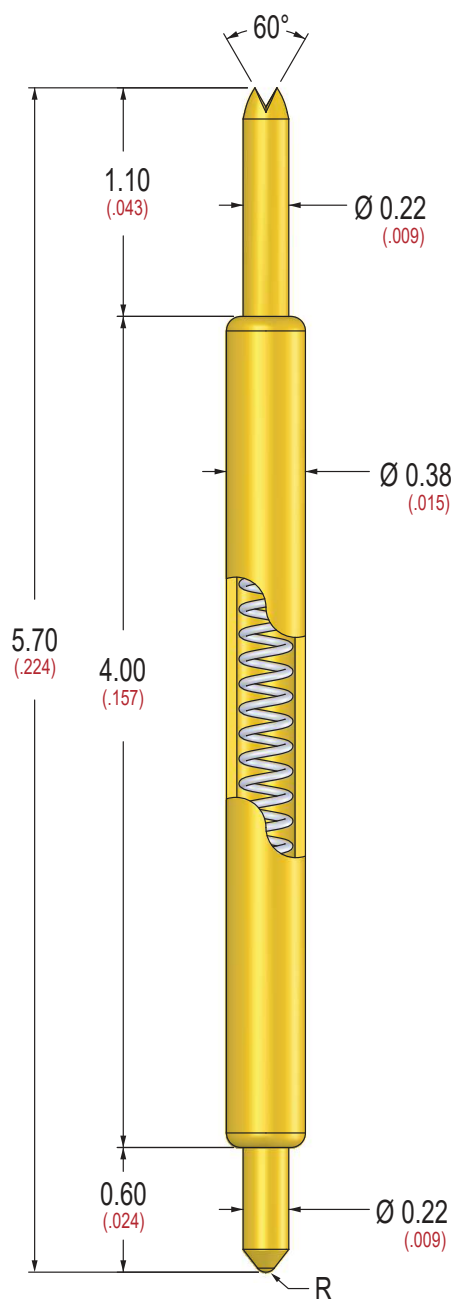




Top Side

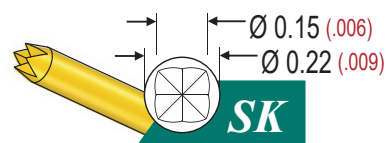

Bottom Side

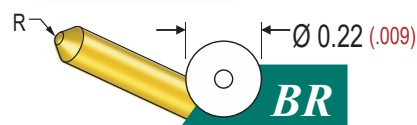

Electrical Specifications

Inductance(nH)	0.97
Capacitance(pF)	0.56
Delay Time(ps)	32
DC resistance(mohm)	<77
S21 @ -0.3dB	8.73GHz
S11 @ -20dB	10.06GHz

Probe Specifications

Full travel	: 1.0mm stroke
Spring Force	: 25gf@0.65mm
Barrel	: PhBz, Gold plated over Nickel
Spring	: SUS wire.
Plunger	: Full-hard beryllium copper or steel, Gold plated over Nickel
Operating Temperature	: -30° ~ 150° C