




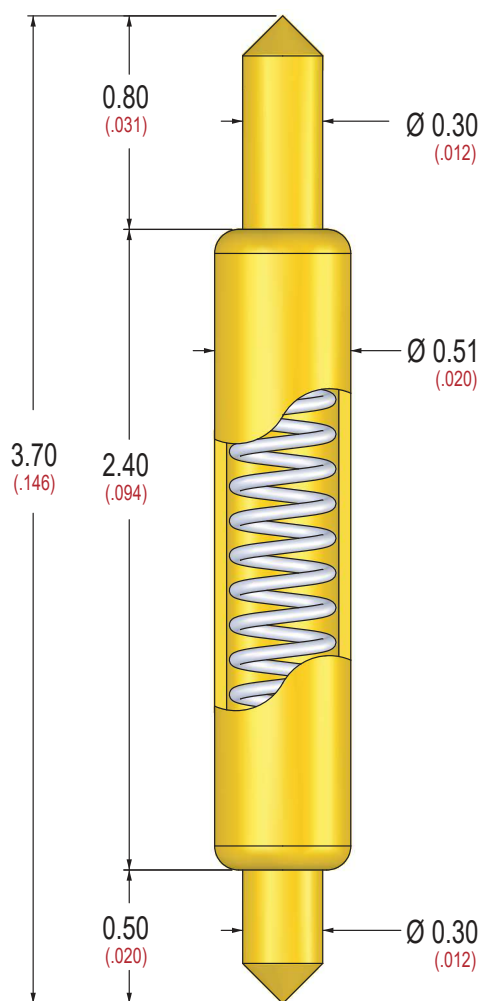

Top Side



Bottom Side



Electrical Specifications

Inductance(nH)	1.29
Capacitance(pF)	0.475
Delay Time(ps)	39.6
DC resistance(mohm)	<47
S21 @-1dB	10GHz
S11 @-20dB	18.19GHz

Probe Specifications

Full travel	: 0.8mm stroke
Spring Force	: 24gf@ 0.55mm
Barrel	: PhBz, Gold plated over Nickel
Spring	: SUS wire.
Plunger	: Full-hard beryllium copper or steel, Gold plated over Nickel
Operating Temperature	: -30° ~ 150° C