




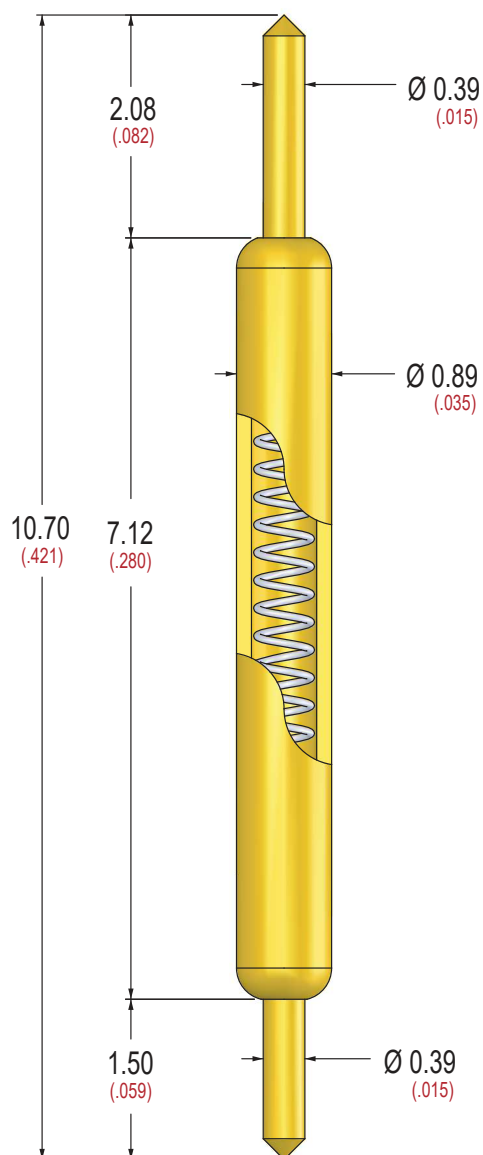

Top Side



Bottom Side



Probe Specifications

Full travel : 1.5mm stroke
 Spring Force : 25gf@ 2.0mm
 Barrel : PhBz, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or steel, Gold plated over Nickel
 Operating Temperature: -30° ~ 150° C