



Probe Specifications

Min. Pitch : 9.0mm
 Current Rating: 3amps continuous
 Spring Force :
 Signal Probe : S =>180g(standard)
 Impedance : 50Ω
 Max.Stroke : 2.0mm

Materials


Dielectric Insulator : Teflon
 Signal Plunger: BeCu,Gold over Nickel
 Shielding Plunger: BeCu,Gold plated
 Connector: SMA female

Signal Plungers





Shielding Plungers

CT25



C22

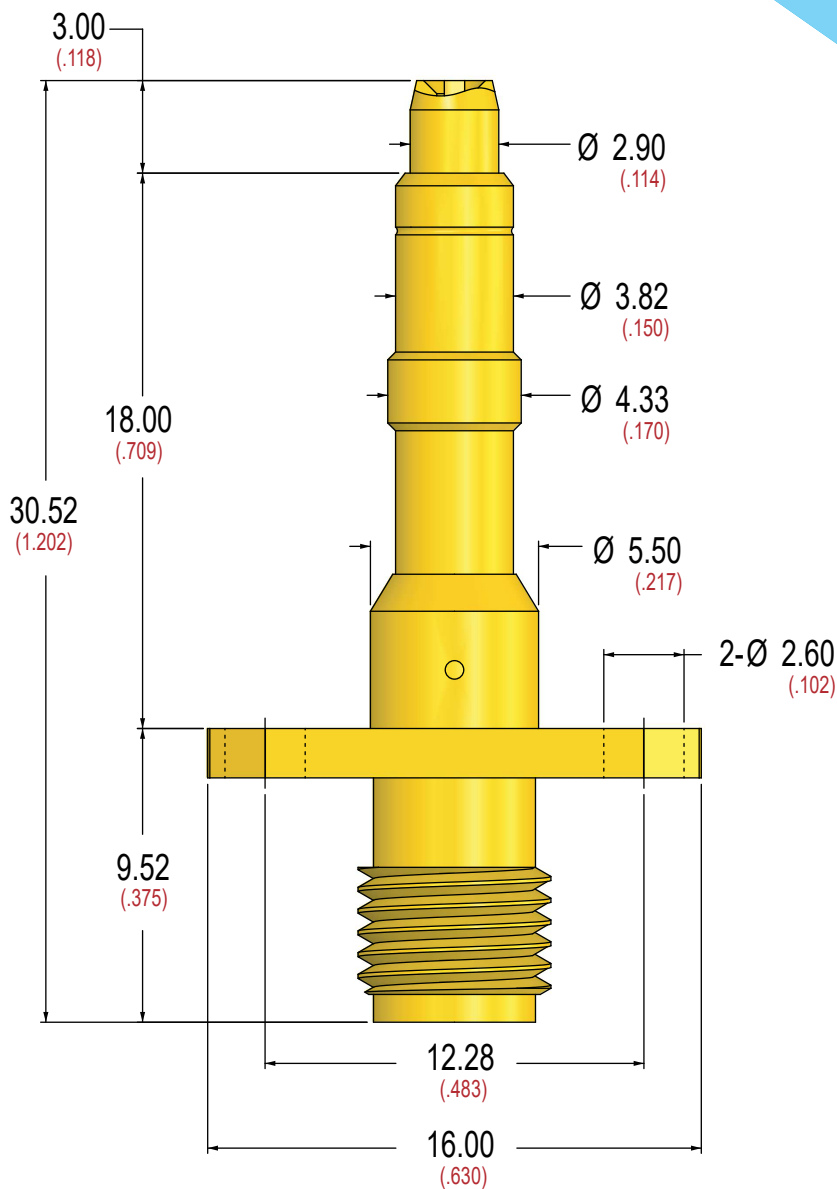

? How To Order

- (A) Shielding Plungers
- (B) Signal Plunger Shape
- (C) Standard Spring Force
- (D) MF=>SMA female with flange
M=>SMA female

