


Probe Specifications

Min. Pitch : 9.0mm
 Current Rating: 3amps continuous
 Spring Force :
 Signal Probe : $S \Rightarrow 180g(\text{standard})$
 Impedance : 50Ω
 Max.Stroke : 1.90mm $\Rightarrow$ tips A,H,P,W,ES
 2.30mm $\Rightarrow$ tips J,K,B

Materials



Dielectric Insulator : Teflon
 Signal Plunger: BeCu,Gold over Nickel
 Shielding Plunger: BeCu,Gold plated
 Connector: SMA female

Signal Plungers

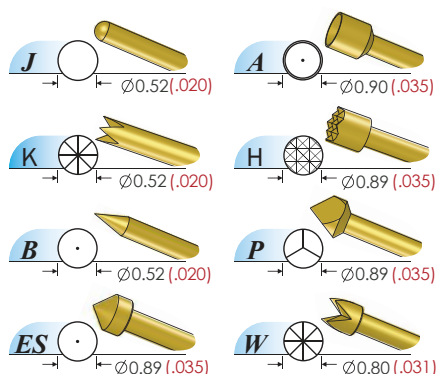

Shielding Plungers

(For MMCX) 2M

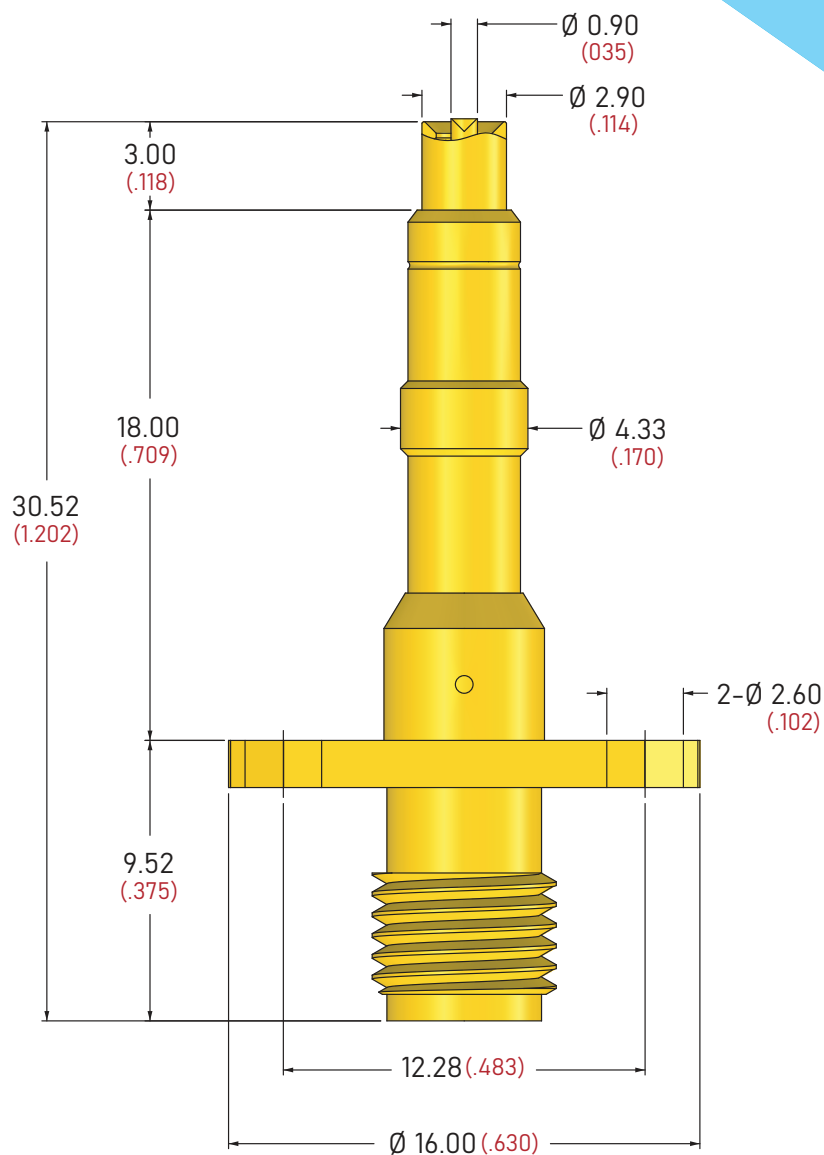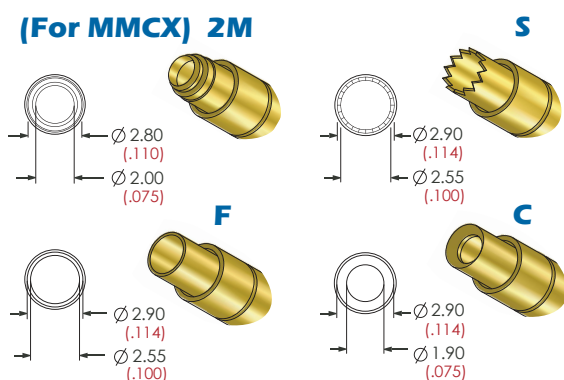

How To Order

- (A) Shielding Plungers
 (B) Signal Plunger Shape
 (C) Standard Spring Force
 (D) MF $\Rightarrow$ SMA female with flange
 M $\Rightarrow$ SMA female

