




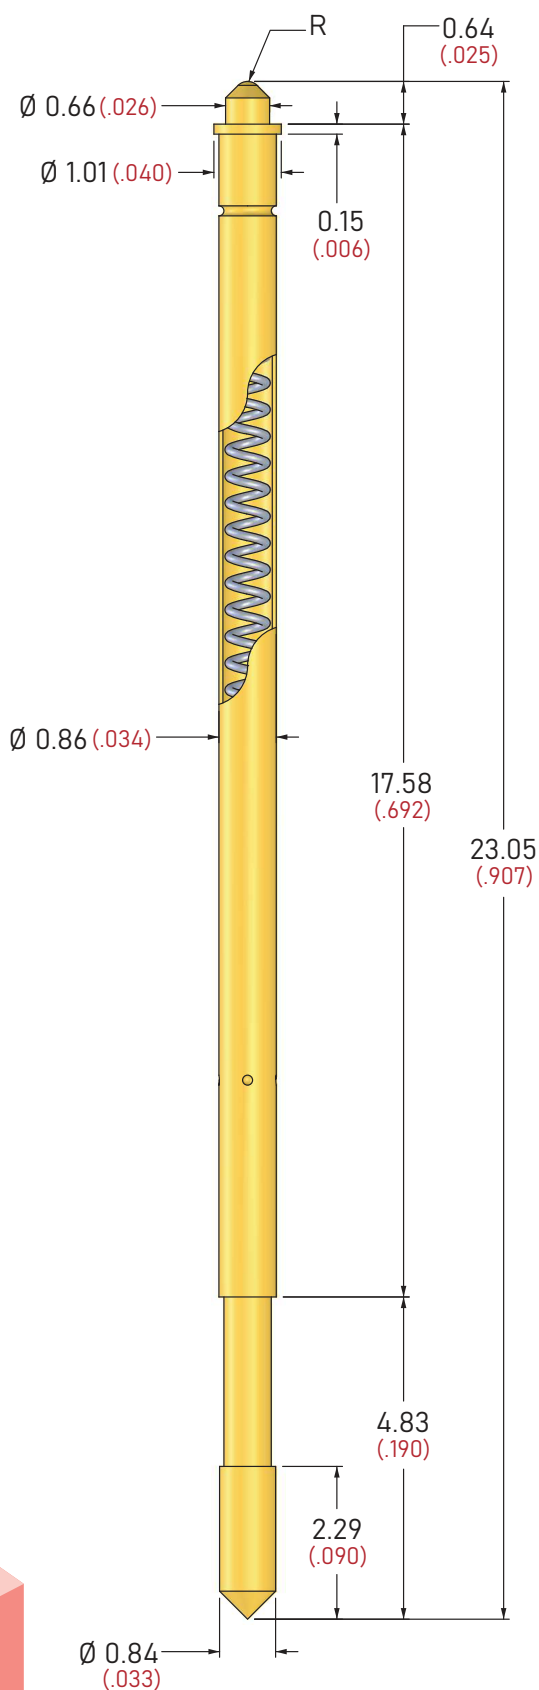

Top Side

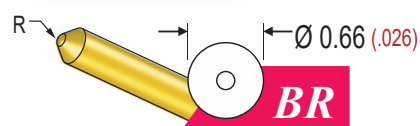

Bottom Side

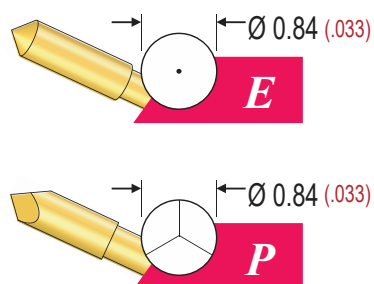

Materials

Barrel : PhBz, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or steel, Gold plated over Nickel

Probe Specifications

Spring Force : 32gf @ 1.5 mm
 35gf @ 1.9 mm
 Barrel : PhBz, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or steel, Gold plated over Nickel
 Operating Temperature: -30° ~ 150° C