



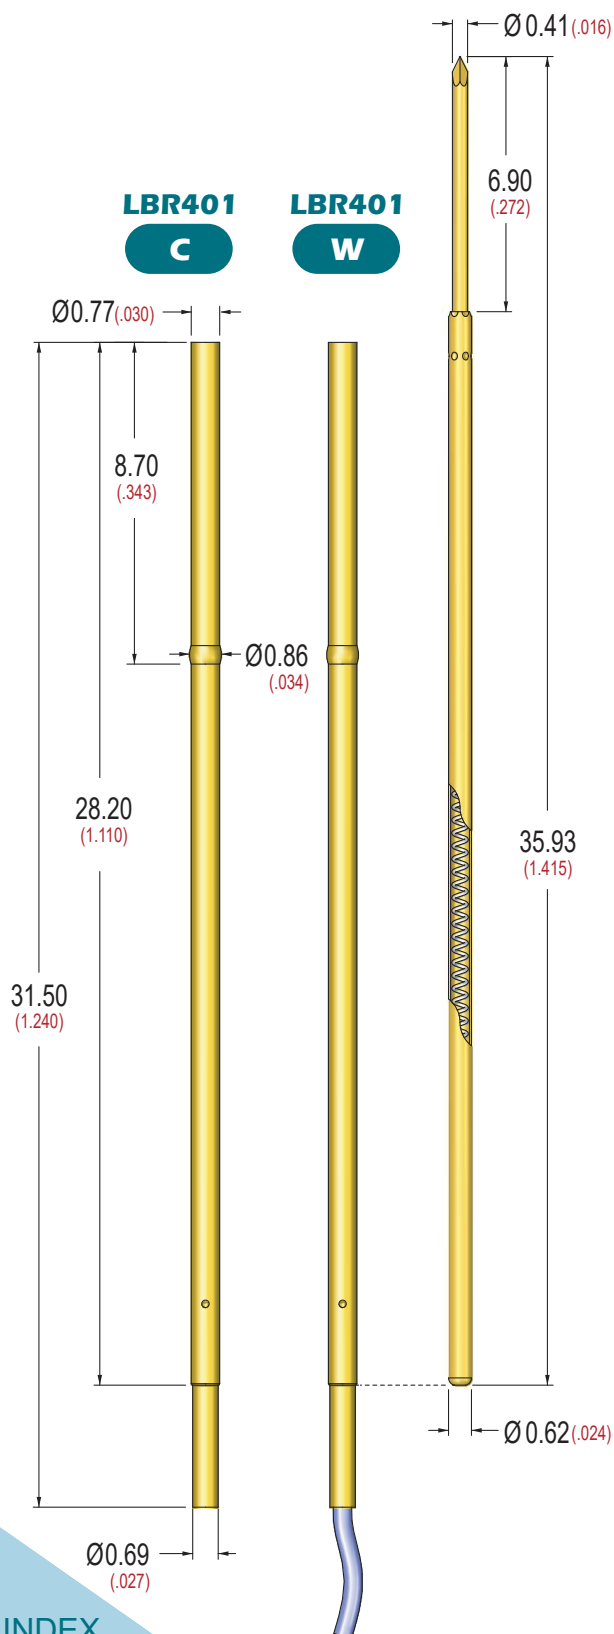

Signal Plungers

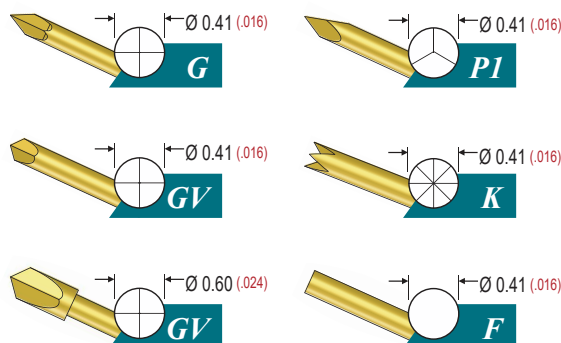

Probe Specifications

Minimum Center : 1.0
Current Rating : 3amps
Contact Resistance: $<25\text{m}\Omega$

Receptacle Specifications

Connections :
LBR401-C : Crimp
LBR401-W-800 : Solder wire

Recommended Wire: 28-30gauge
Mounting Hole Size : 0.75/0.8

Materials

Barrel : PhBz, Gold plated over Nickel
Spring : SUS wire.
Plunger : Carbon steel,
Gold plated over Nickel
Receptacle : BST, Gold plated

Insertion Pressure : 0.2~0.5kgf

HOW TO ORDER

SLB - **401** - **G** - **0.41** - **H**
Series Size Tip-Style Tip Diameter Spring Force

RECEPTACLE

LBR - **401** - **W** - **800**
Series Size Vacuum Post length

SPRING FORCE

2/3 Travel	L	S	H	Y	X	U
SLB401 (g)	102	156	198	-	-	-

