



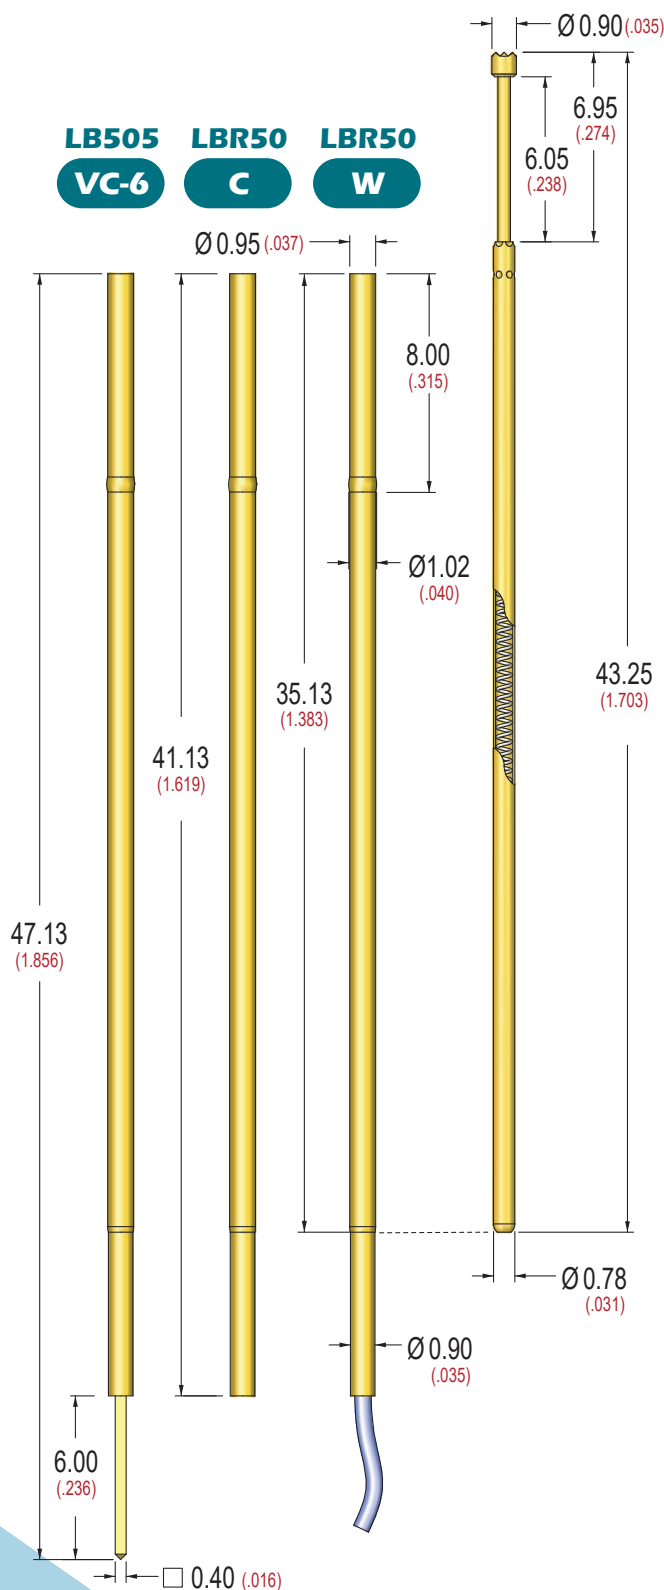

Signal Plungers

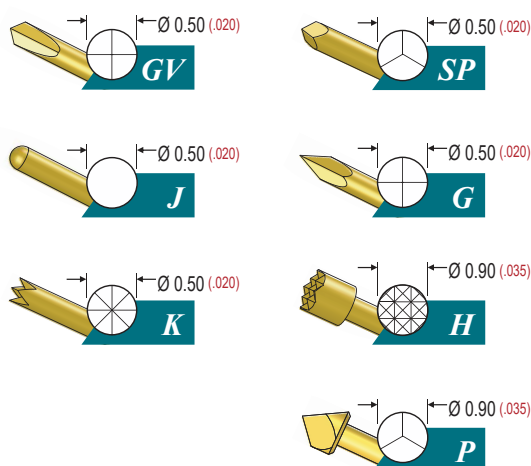

Probe Specifications

Minimum Center : 1.27
Current Rating : 3amps
Contact Resistance: $<25\text{m}\Omega$

Materials

Barrel : PhBz, Gold plated over Nickel
Spring : SUS wire.
Plunger : Carbon steel,
Gold plated over Nickel
Receptacle : BST, Gold plated
Terminal : Brass, Gold plated over Nickel

Receptacle Specifications

Connections :
LBR50-C : Crimp
LBR50-VC-6 : Wire Wrap
(Vacuum seal)
LBR50-W-() : Pre-attached wire
(length)

0.40 Square post

Recommended Wire: 28-30gauge
Mounting Hole Size : 0.9/0.95

Insertion Pressure : 0.7~1.0kgf

HOW TO ORDER

SLB - 50 - H - 0.9 - H
Series Size Tip-Style Tip Diameter Spring Force

RECEPTACLE

LBR - 50 - VC - 6
Series Size Vacuum Post length

SPRING FORCE

2/3 Travel	L	S	H	Y	X	U
SLB50 (g)	102	156	198	-	-	-

