



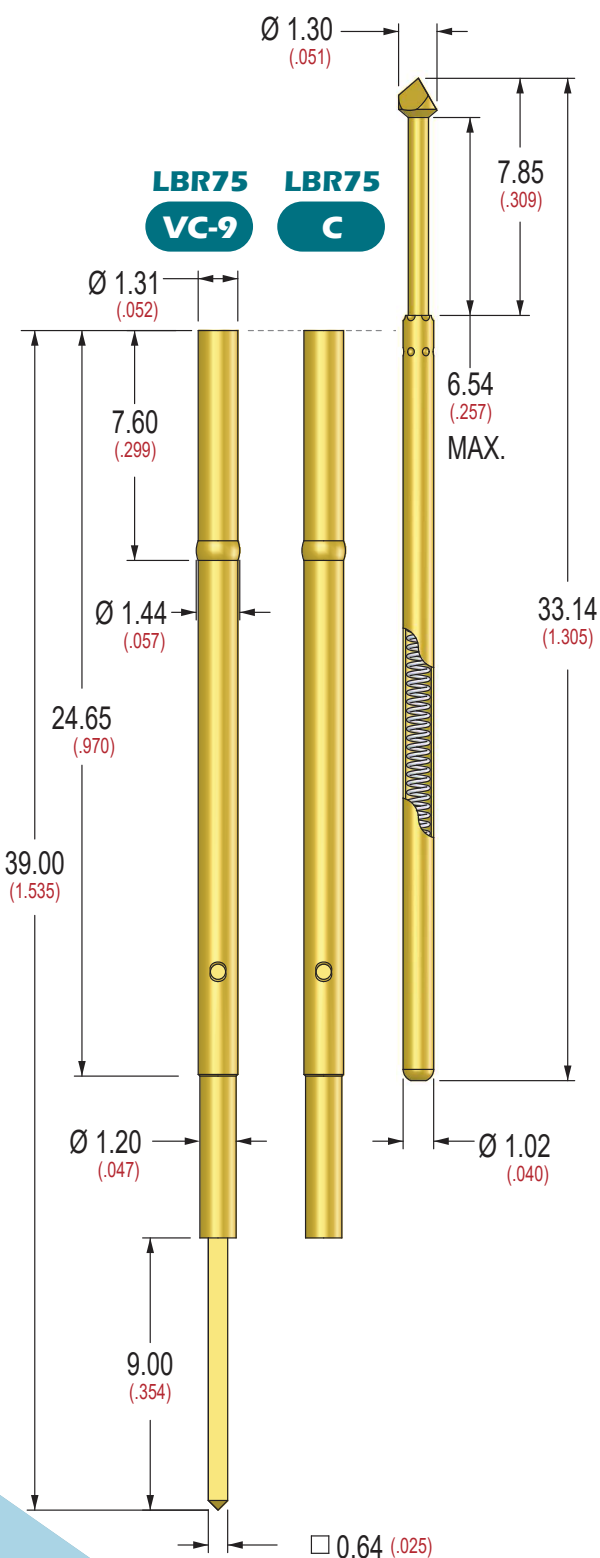

Signal Plungers

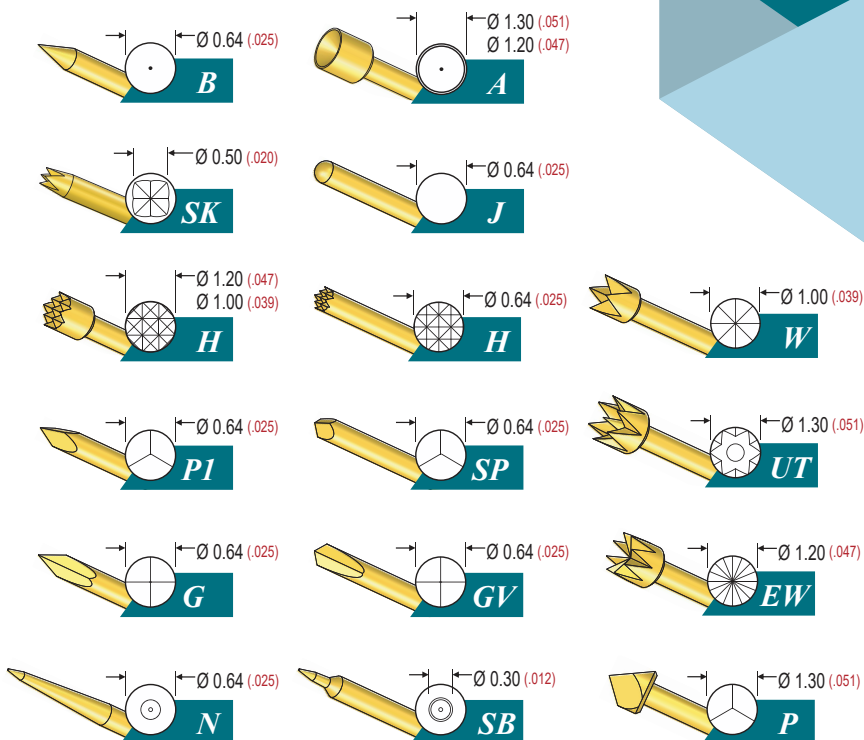

Probe Specifications

Minimum Center : 1.91
Current Rating : 3amps
Contact Resistance: <16mΩ

Materials

Barrel : PhBz, Gold plated over Nickel
Spring : SUS wire.
Plunger : Carbon steel, Gold plated over Nickel
Receptacle: BST, Gold plated
Terminal : Brass, Gold plated over Nickel

Receptacle Specifications

Connections :
LBR75-C : Crimp
LBR75-VC-9 : Wire Wrap (Vacuum seal)
0.64 Square post, 9.0 length

Recommended Wire : 28-30gauge
Mounting Hole Size: 1.40/1.45

Insertion Pressure : 0.6~0.9kgf

HOW TO ORDER

SLB - **75** - **P** - **1.3** - **L**
Series Size Tip-Style Tip Diameter Spring Force

RECEPTACLE

LBR - **75** - **VC** - **9**
Series Size Vacuum Post length

SPRING FORCE

2/3 Travel	L	S	H	Y	X	U
SLB75 (g)	88	159	198	-	-	-

