


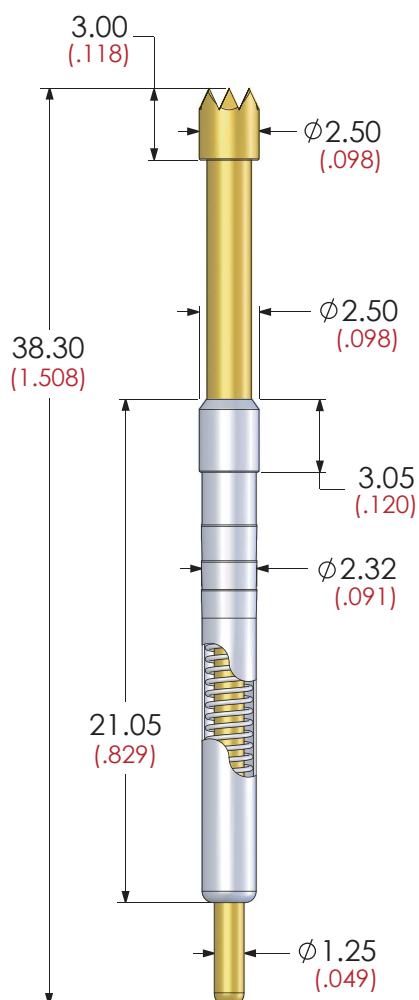


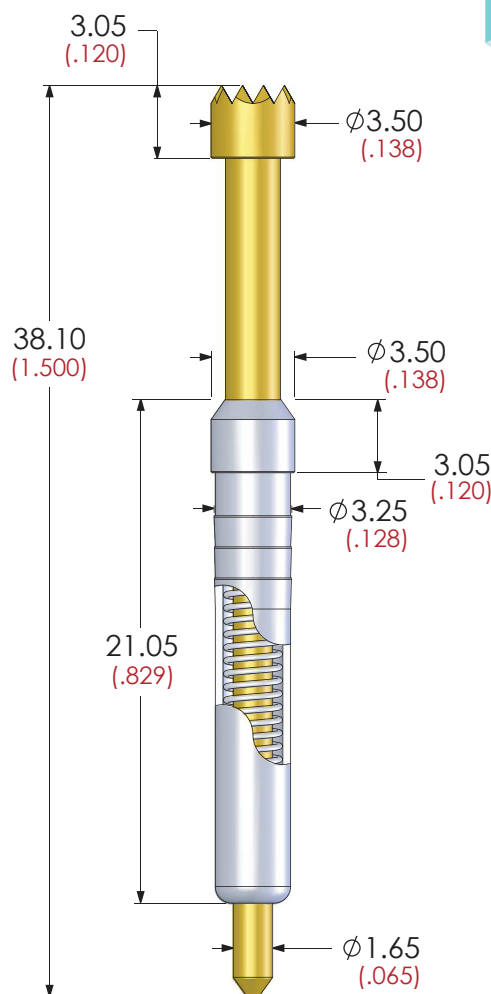

TSK-4H



TSK-5H



Probe Specifications

Full travel : 10.0mm stroke
 Spring Force : 160gf @ 10.0mm
 Barrel : PhBz, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or steel, Gold plated over Nickel
 Operating Temperature: -30~150°C

Probe Specifications

Full travel : 10.0mm stroke
 Spring Force : 170gf @ 10.0mm
 Barrel : PhBz, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or steel, Gold plated over Nickel
 Operating Temperature: -30~150°C