


Battery Contact

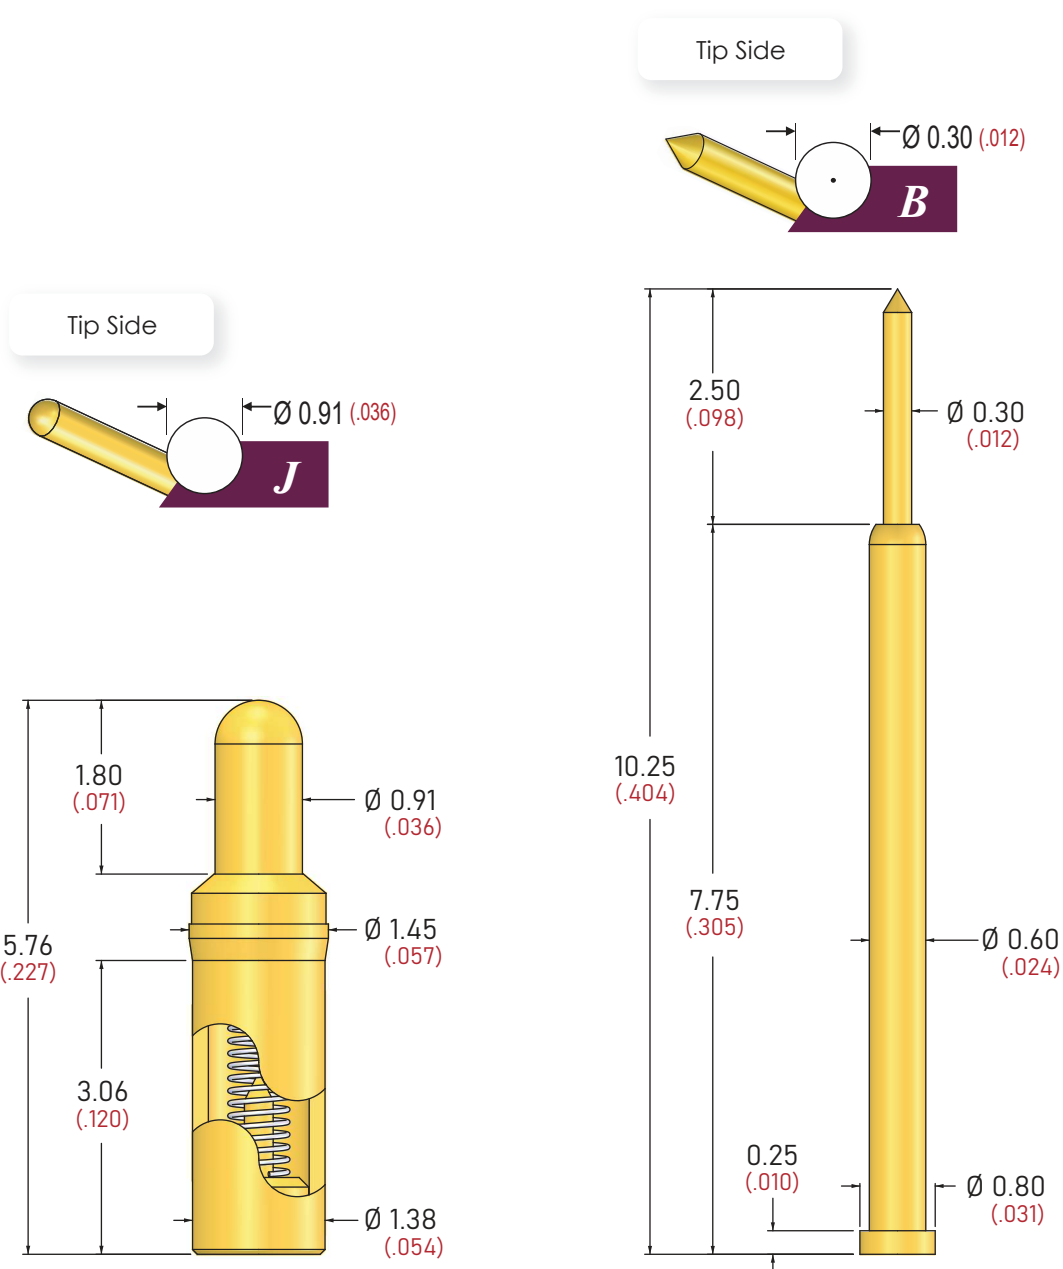

TB-03-137-J-P

Materials

Barrel : Brass, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or Carbon steel,
 Gold plated over Nickel

Probe Specifications

Minimum Center : 1.90(.075)
 Current Rating : 5amps
 Contact Resistance : <25mΩ
 Spring force : 80g@1.2mm
 Max.Stroke : 1.80mm

TB060B030

Materials

Barrel : Brass, Gold plated over Nickel
 Spring : SUS wire.
 Plunger : Full-hard beryllium copper
 or Carbon steel,
 Gold plated over Nickel

Probe Specifications

Minimum Center : 1.00 (.039)
 Current Rating : 3amps
 Contact Resistance : <40mΩ
 Spring force : 5g@1.0mm
 Max.Stroke : 2.50mm

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)