




Battery Contact



Tip Side



Tip Side

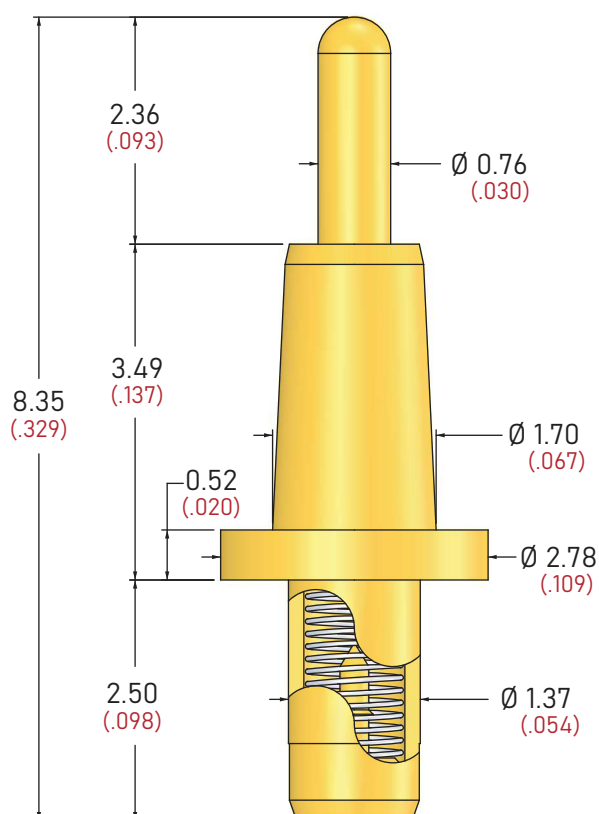


TB-01F-J-P

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 3.18(.125)
Current Rating : 10amps
Contact Resistance : <10mΩ
Spring force : 145g@1.5mm
Max.Stroke : 2.36mm

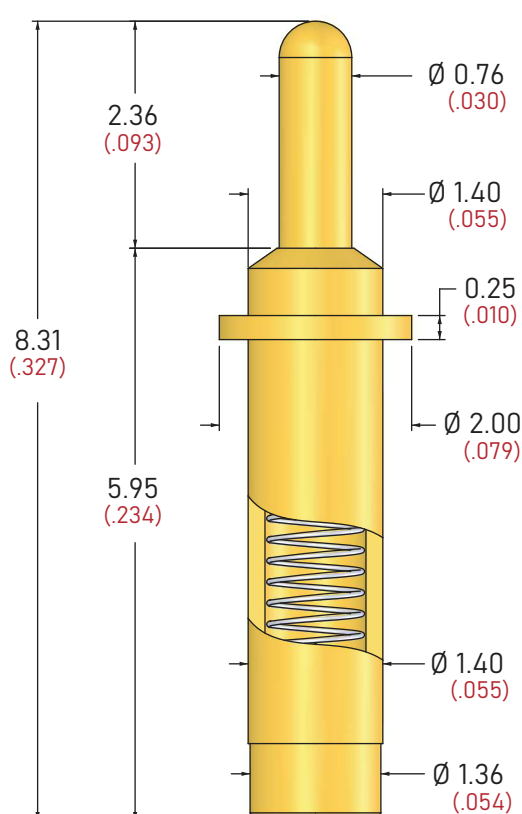

TB-ST-J-0.76

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 2.80 (.110)
Current Rating : 5amps
Contact Resistance : <25mΩ
Spring force : 120g@1.5mm
Max.Stroke : 2.36mm

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)