



Battery Contact

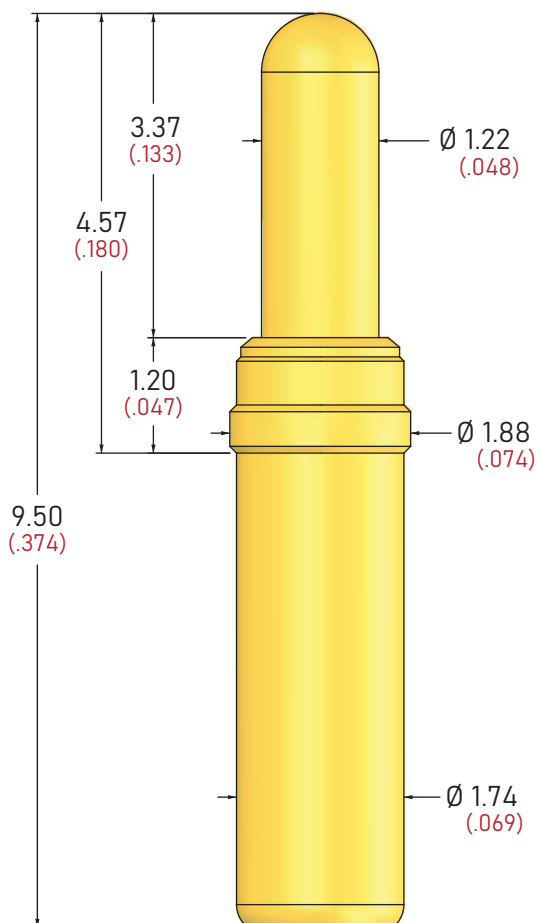

Tip Side

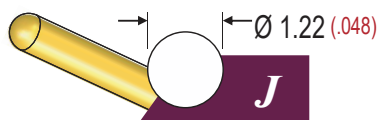

CBCP-950J



Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 2.00 (.079)
Current Rating : 5amps
Contact Resistance : <10mΩ
Spring force : 74g@1.7mm
Max.Stroke : 3.37mm

Tip Side

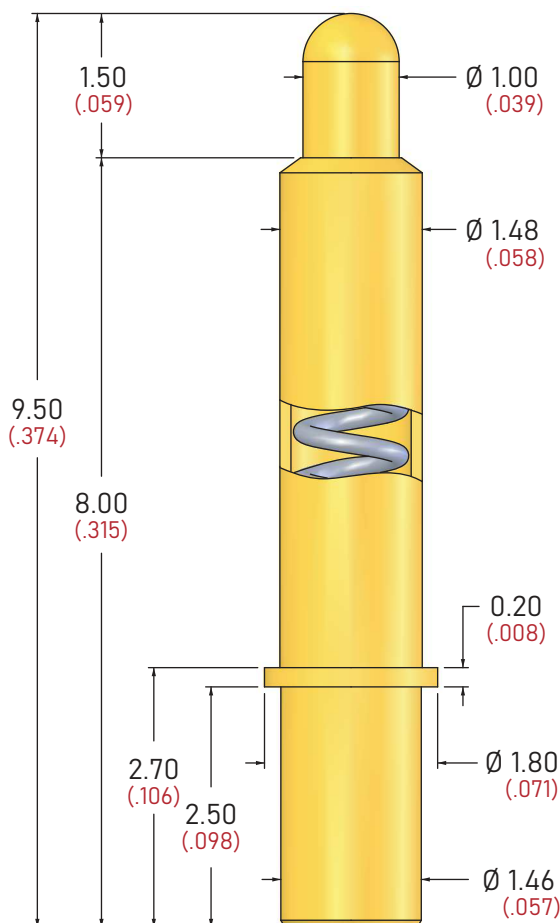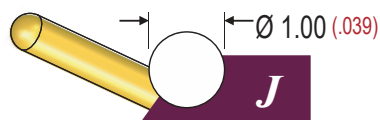

CBC-1895J-M1

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 2.00 (.079)
Current Rating : 5amps
Contact Resistance : <25mΩ
Spring force : 40g@1.0mm
Max.Stroke : 1.50mm

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)