




Battery Contact



Tip Side



Tip Side

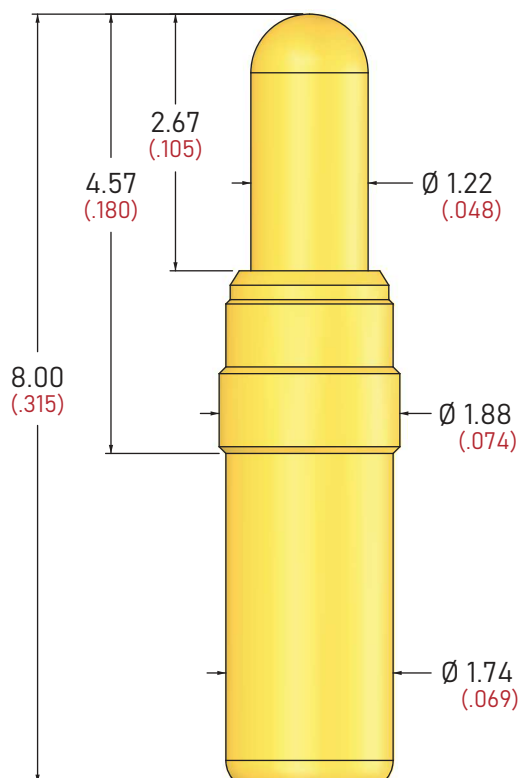


CBCP-800J

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 2.00 (.079)
Current Rating : 5amps
Contact Resistance : <10mΩ
Spring force : 74g@1.7mm
Max.Stroke : 2.67mm

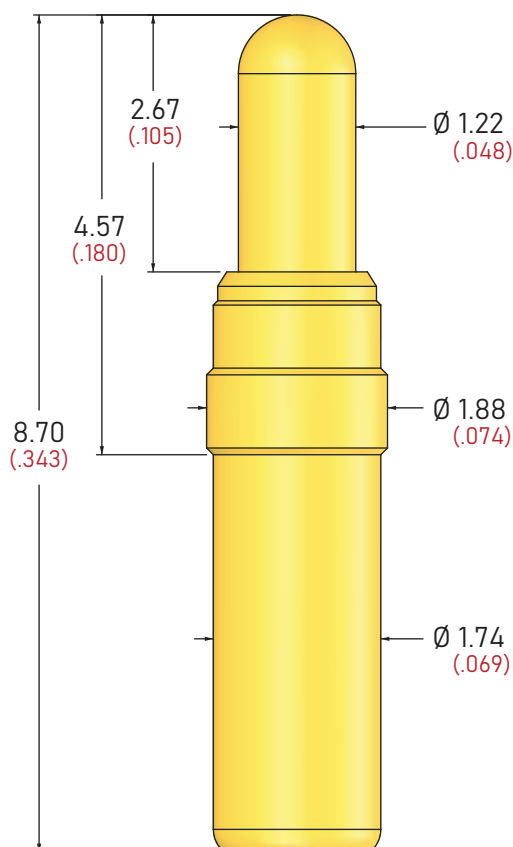

CBCP-870J

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 2.00 (.079)
Current Rating : 5amps
Contact Resistance : <10mΩ
Spring force : 74g@1.7mm
Max.Stroke : 2.67mm

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)