




Battery Contact



Tip Side

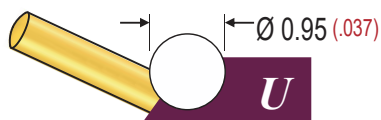

Tip Side

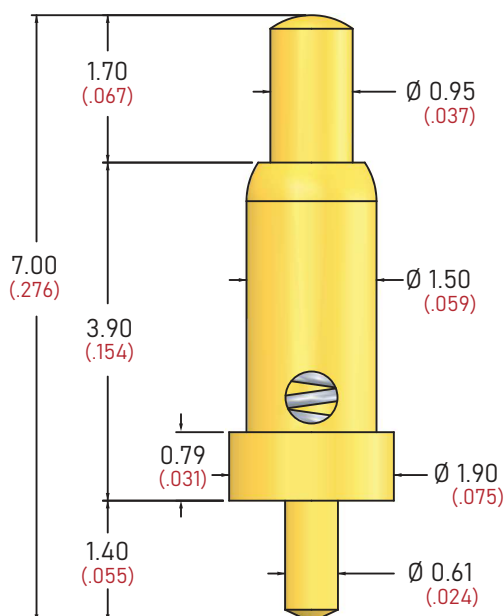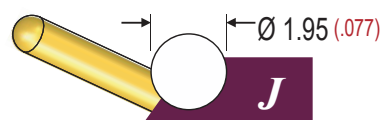


BC-190-700-U

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 2.00 (.079)
Current Rating : 5amps
Contact Resistance : <10mΩ
Spring force : 110g@0.8mm
Max.Stroke : 1.70mm

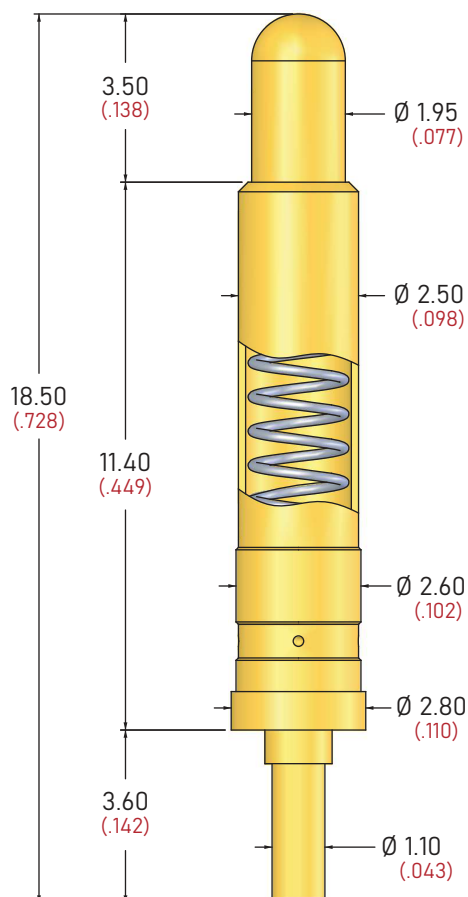

GT-C2000

Materials

Barrel : Brass, Gold plated over Nickel
Spring : SUS wire.
Plunger : Full-hard beryllium copper
or Carbon steel,
Gold plated over Nickel

Probe Specifications

Minimum Center : 3.18 (.125)
Current Rating : 5amps
Contact Resistance : <20mΩ
Spring force : 50g@2.6mm
Max.Stroke : 3.50mm

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)