



# Battery Contact

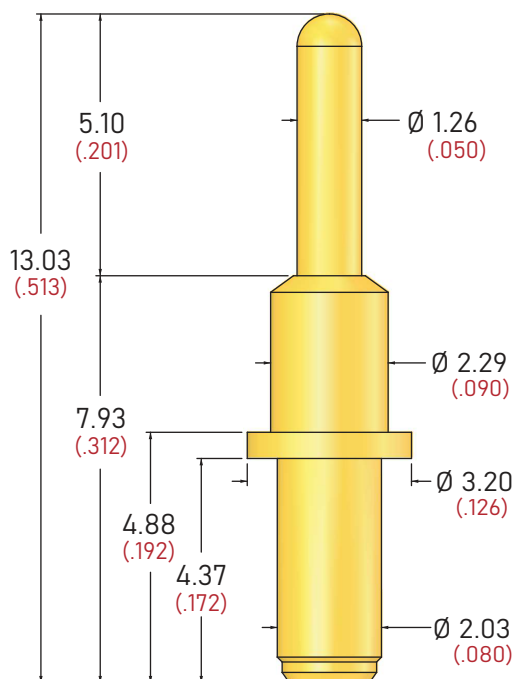

Tip Side



## CBCF-1300J-155



### Materials

Barrel : Brass, Gold plated over Nickel  
Spring : SUS wire.  
Plunger : Full-hard beryllium copper  
or Carbon steel,  
Gold plated over Nickel

### Probe Specifications

Minimum Center : 3.80 (.150)  
Current Rating : 5amps  
Contact Resistance : <25mΩ  
Spring force : 50g@3.7mm  
Max.Stroke : 5.10mm

Tip Side

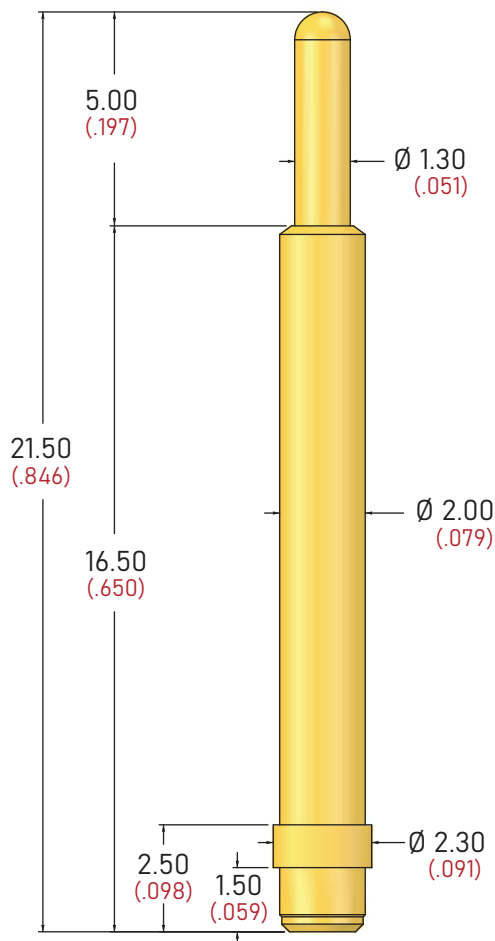

## CBCF-2150J

### Materials

Barrel : Brass, Gold plated over Nickel  
Spring : SUS wire.  
Plunger : Full-hard beryllium copper  
or Carbon steel,  
Gold plated over Nickel

### Probe Specifications

Minimum Center : 2.80 (.110)  
Current Rating : 5amps  
Contact Resistance : <30mΩ  
Spring force : 40g@3.0mm  
Max.Stroke : 5.00mm

◀ INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)