



Probe Specifications

Min. Pitch : 9.0mm
 Current Rating: 3amps continuous
 Spring Force
 Signal Probe : $S \Rightarrow$ 180g (standard)
 Shielding Plunger : 350g
 Impedance : 50 Ω
 Max.Stroke : 1.90mm $\Rightarrow$ tips A
 2.30mm $\Rightarrow$ tips J





Materials

Dielectric Insulator : Teflon
 Signal Plunger: BeCu,Gold over Nickel
 Shielding Plunger: BeCu,Gold plated
 Connector: SMA female

Signal Plungers




Shielding Plungers

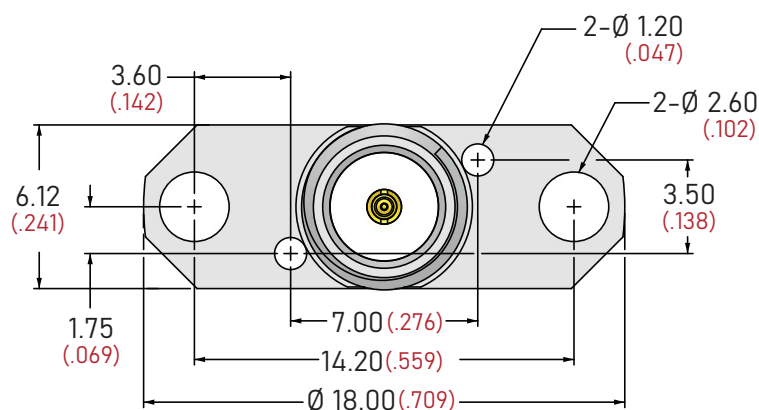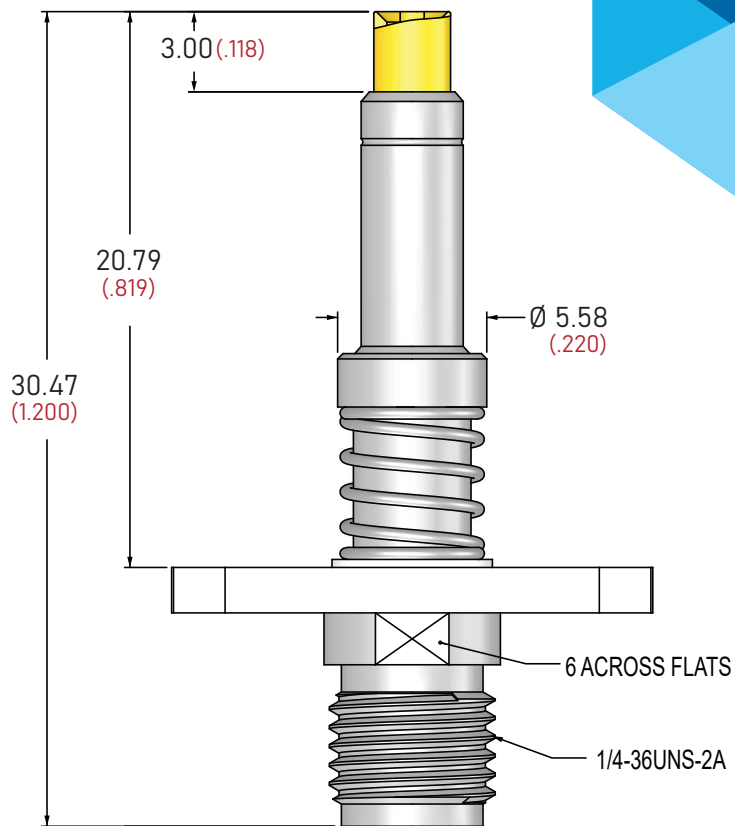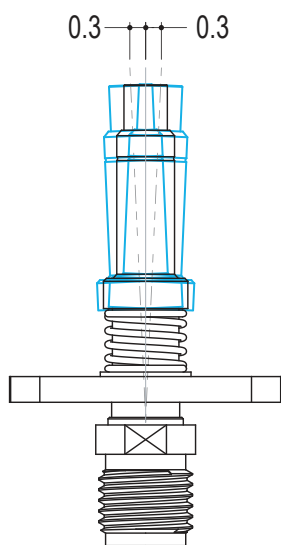

Bottom View

? How To Order

- (A) Signal Plunger Shape
- (B) Standard Spring Force
- (C) MF $\Rightarrow$ SMA female with flange
M $\Rightarrow$ SMA female

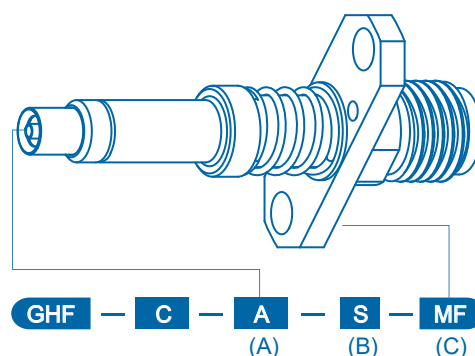

Matching Parts :
 20279
 MM9329-2700

INDEX



sales@stargo.com.tw

Specifications subject to change without notice. Dimensions in millimeters (inches)