



Probe Specifications

Min. Pitch : 9.0mm
 Current Rating: 3amps continuous
 Spring Force
 Signal Probe : $\boxed{S}$ => 180g (standard)
 Shielding Plunger : 350g
 Impedance : 50 Ω
 Max.Stroke : 1.90mm=>tips A
 2.30mm=>tips J




Materials

Dielectric Insulator : Teflon
 Signal Plunger: BeCu,Gold over Nickel
 Shielding Plunger: BeCu,Gold plated
 Connector: SMA female

Signal Plungers



Shielding Plungers

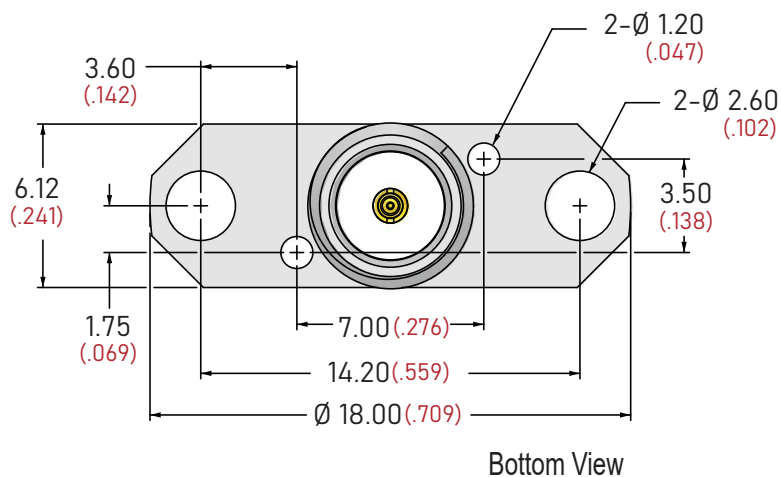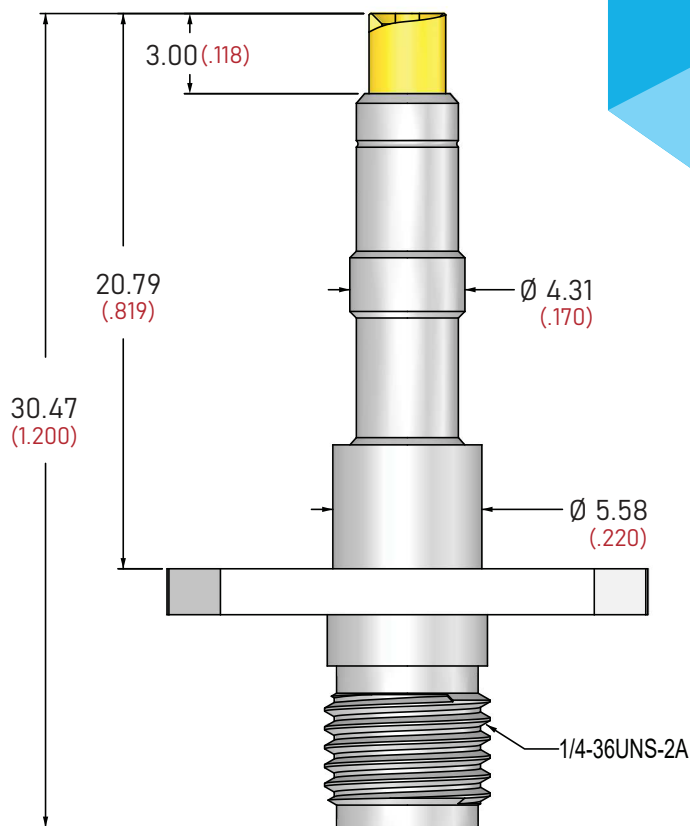

INDEX

Matching Parts :
 20279
 MM9329-2700

How To Order

- (A) Signal Plunger Shape
 (B) Standard Spring Force
 (C) MF=>SMA female with flange
 M=>SMA female

