






Probe Specifications

Min. Pitch : 6.5mm
 Current Rating: 3amps continuous
 Spring Force :
 Signal Probe : $S \Rightarrow 180g$ (standard)
 Impedance : 50Ω
 Max.Stroke : 1.9mm=>tips A,H,P,W,ES
 2.3mm=>tips J,K,B

Materials

Dielectric Insulator : Teflon
 Signal Plunger: Steel,Gold over Nickel
 Ground Probe: Steel,Gold over Nickel
 Connector : SMA female

Signal Plungers

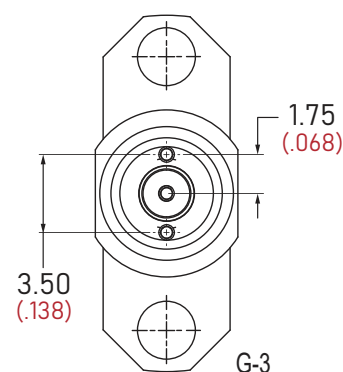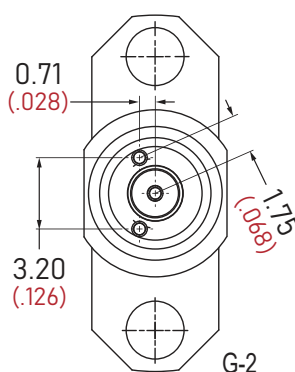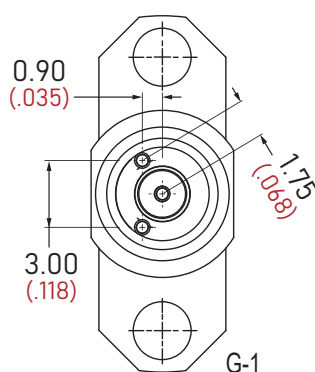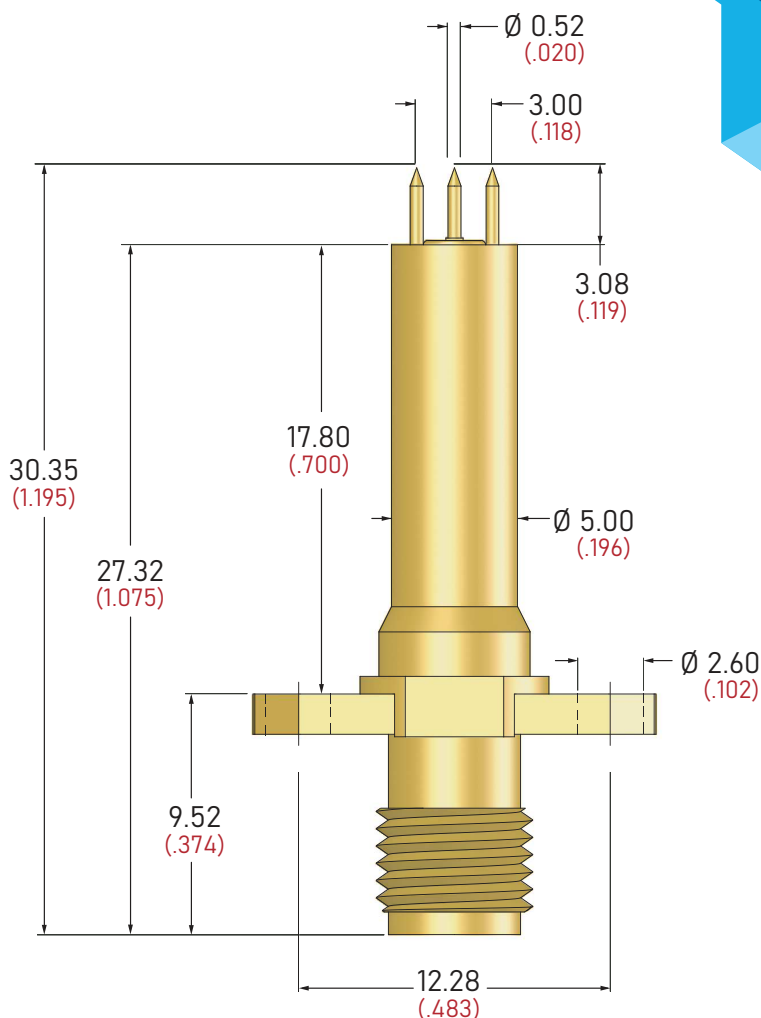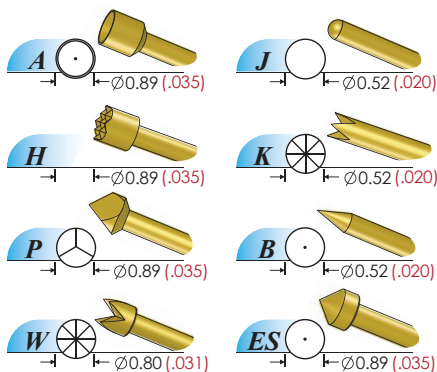

How To Order

- (A) Signal Plunger Shape
- (B) Ground Probe Plungers
- (C) Standard Spring Force
- (D) G= Ground Pin Distance
G-1=3.0 , G-2=3.2 , G-3=3.5

