



Probe Specifications

Min. Pitch : 9.5mm
 Current Rating: 3amps continuous
 Spring Force : 250g @2.6mm
 Signal Probe : S =>180g(standard)
 Impedance : 50Ω
 Max.Stroke : 3.5mm

Materials

Dielectric Insulator : Teflon
 Signal Plunger: BeCu,Gold over Nickel
 Shielding Plunger: BeCu,Gold plated
 Connector: SMA female

Signal Plungers

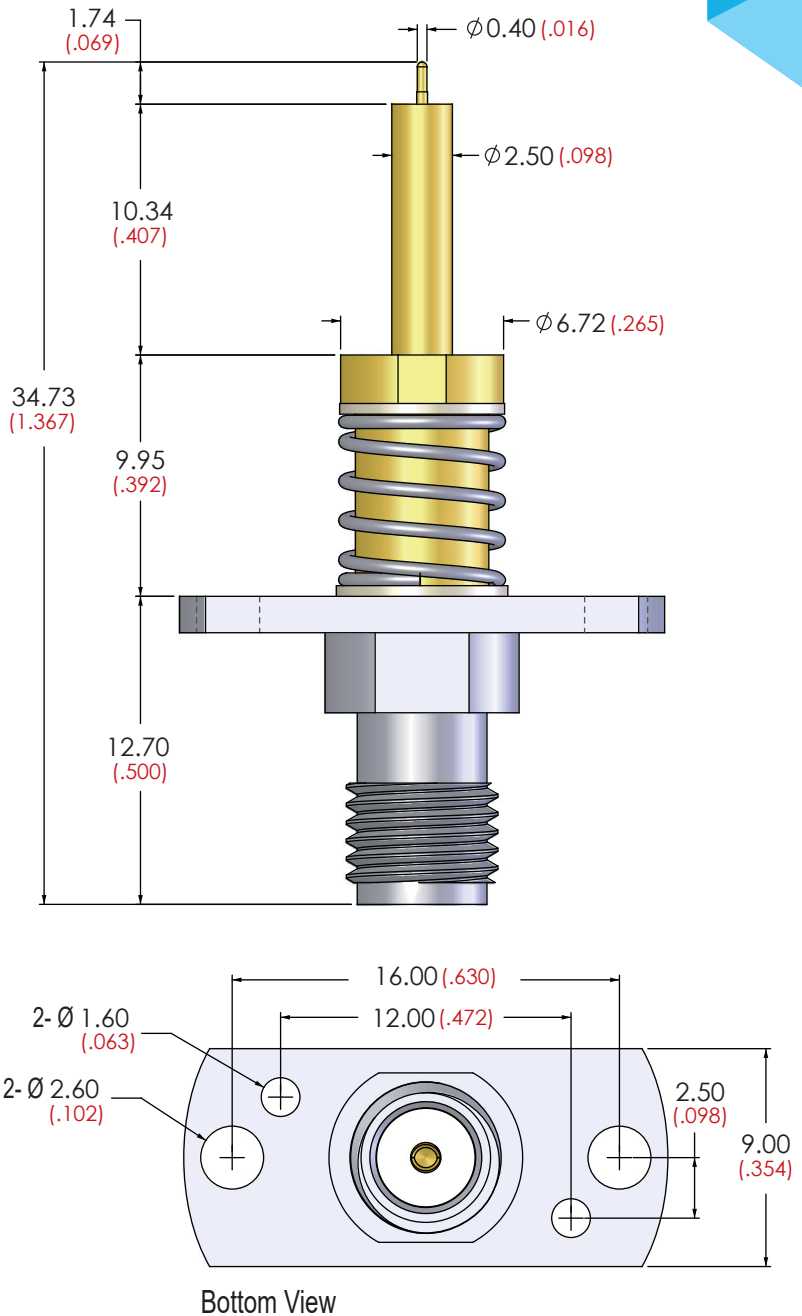

? How To Order

- (A) Signal Plunger Shape
 (B) Standard Spring Force
 (C) MF=>SMA female with flange
 M=>SMA female

